

M&P Extraflex BURY 1.400"




JACKET :
UV shielded polyethylene
for direct burial and outdoor use
overall Ø 10,3mm ± 0,15
(0.405")

REACTIVE BRAID :
85% SCREENING - 192 wires of copper clad aluminium
made with 24 spool machines (instead of 16). Thanks to 50%
more crossovers, grants exceptional Screening Attenuation
(SA) and reacts to twisting and bending like a spring

FOIL: 100% SCREENING
First screen made of copper
with an applied PE-layer: prevents
cracking due to short radius bends

*To prevent braid oxidation,
we apply a Petrol Jelly layer
adding waterproofing protection.

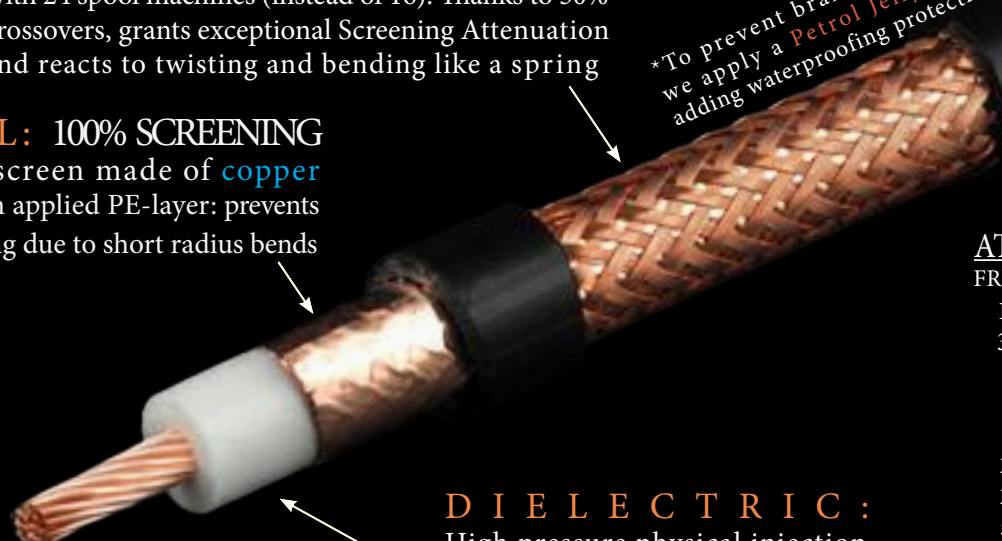

DIELECTRIC :
High pressure physical injection
foamed polyethylene
TRIPLE LAYER
overall Ø 7,3 mm ± 0,05 (0.287")

INNER CONDUCTOR :
19x0,59mm copper wires - overall Ø 2,9 mm ± 0,15
(19x0.023" - overall Ø 0.114")

ATTENUATION (20°C/68°F)

FREQUENCY	dB/100m	dB/100ft
1,8 MHz	0,8	0,2
3,5 MHz	1,0	0,3
7 MHz	1,1	0,3
10 MHz	1,3	0,4
14 MHz	1,5	0,4
21 MHz	1,8	0,5
28 MHz	2,0	0,6
50 MHz	2,7	0,8
100 MHz	3,9	1,1
144 MHz	4,7	1,4
200 MHz	5,6	1,7
400 MHz	8,3	2,5
430 MHz	8,6	2,6
800 MHz	11,9	3,6
1000 MHz	13,4	4,1
1296 MHz	15,4	4,7
2400 MHz	21,8	6,6
3000 MHz	24,6	7,5
4000 MHz	29,1	8,8
5000 MHz	33,1	10,0
6000 MHz	36,9	11,2
7000 MHz	40,7	12,4
8000 MHz	44,2	13,4
9000 MHz	47,5	14,4
10.000 MHz	50,7	15,4

ELECTRICAL DATA

Impedance @200Mhz:	50 Ohm ± 3
Minimum bending radius:	up to 15 bends: 80mm (3.15 in) single bend (choke): 40mm (1.57 in)
Temperature:	40°C to +60°C (-40°F to +140°F)
Capacitance:	78 pF/m ± 2 (23.8 pF/ft ± 2)
Velocity factor:	87%
Screening Efficiency (SA)	100-2000 MHz >105 dB
Inner conductor resistance:	3,6 Ohm/Km (1.0 Ohm/1000ft)
Outer conductor resistance:	12 Ohm/Km (2.8 Ohm/1000ft)
Tension test (spark test):	8 kV
Net weight (100m/100ft):	10,4 Kg (7 lb)
Maximum peak power:	10000 WATT
Structural Return Loss:	0,3-600 MHz >30 dB 600-1200 MHz >25 dB 1200-2000 MHz >20 dB

POWER HANDLING (40°C/104°F)

FREQUENCY	MAX P.	FREQUENCY	MAX P.
1,8 MHz	9927 W	430 MHz	808 W
3,5 MHz	7721 W	800 MHz	581 W
7 MHz	5990 W	1000 MHz	516 W
10 MHz	5186 W	1296 MHz	449 W
14 MHz	4483 W	2400 MHz	319 W
21 MHz	3777 W	3000 MHz	282 W
28 MHz	3357 W	4000 MHz	239 W
50 MHz	2518 W	5000 MHz	210 W
100 MHz	1759 W	6000 MHz	188 W
144 MHz	1460 W	7000 MHz	171 W
200 MHz	1226 W	8000 MHz	157 W
400 MHz	837 W	10.000 MHz	137 W

WHY CHOOSE THIS CABLE

- The only coax that can be use for outdoor use, direct burial, tight bendings and rotor antennas simultaneously.
- Infact, it combine a great flexibility (thanks to 19 wires on the conductor) to a resistant tearproof sheath.
- We have applied a petrol jelly layer that helps to prevent oxidation and makes it waterproof.
- Best performances and attenuation for a 10mm stranded core coaxial cable!

FREQUENCY SUGGESTIONS

HF (from 3MHz to 30Mhz)

example at 14 MHz

EXCELLENT up to 100m of cable length

GOOD up to 160m of cable length

Choose Ø 12,7mm cable above 160m

example 28 MHz

EXCELLENT up to 75m of cable length

GOOD up to 120m of cable length

Choose Ø 12,7mm cable above 120m

VHF (from 30MHz to 300Mhz)

example at 50 Mhz

EXCELLENT up to 60m of cable length

GOOD up to 80m of cable length

Choose Ø 12,7mm cable above 80m

example at 144 Mhz

EXCELLENT up to 35m of cable length

GOOD up to 60m of cable length

Choose Ø 12,7mm cable above 60m

UHF (from 300MHz to 3000Mhz)

example at 430 MHz

EXCELLENT up to 20m of cable length

GOOD up to 30m of cable length

Choose Ø 12,7mm cable above 28m

example at 1296 MHz

EXCELLENT up to 12m of cable length

GOOD up to 17m of cable length

Choose Ø 12,7mm cable above 17m

example at 2400 MHz

EXCELLENT up to 8m of cable length

GOOD up to 10m of cable length

Choose Ø 12,7mm cable above 12m

*data valuable for Power Application (trasmission)

**you can find Watt / MAX POWER in the datasheet above.



RESIDUAL POWER PERCENTAGE (Cable Run Efficiency)

Given a power fed to the X value (any value expressed in Watts), the actual power output of the cable is shown in the table in the form of remaining percentage. (for example, if we use a cable such as M&P-EXTRAFLEX BURY, entering 1000 Watts over a length of 35m, at a frequency of 144 MHz, there remains 68% of 1000). **For maximum applicable power, see the Power Handling of the cable concerned.** From these values, have already been deducted the SRL values, typical of each one of our models, for the respective frequencies. **REMEMBER: Make sure to match the line accurately!**

		M&P-EXTRAFLEX BURY 10 / .400"													
feet		16,4	32,8	49,2	65,6	82	114,8	164	246	328	426,5	524,9	656,2	984,2	
meters		5	10	15	20	25	35	50	75	100	130	160	200	300	
Wave length	MHz	Useful signal output (residual power %)													
85.71 m	3,5	98,9	97,8	96,8	95,8	94,9	92,9	90,1	85,5	81,2	76,3	71,7	66,0	53,6	
42.85 m	7	98,6	97,3	96,0	94,7	93,4	91,0	87,4	81,7	76,5	70,6	65,1	58,5	44,8	
21.42 m	14	98,1	96,4	94,7	93,0	91,4	88,2	83,6	76,4	69,9	62,8	56,4	48,9	34,2	
10.71 m	28	97,5	95,2	93,0	90,8	88,7	84,5	78,7	69,8	62,0	53,7	46,5	38,4	23,8	
6 m	50	96,8	93,7	90,8	88,0	85,2	80,0	72,7	62,0	52,9	43,7	36,1	28,0	14,8	
2 m	144	94,6	89,5	84,7	80,2	75,9	68,0	57,7	43,9	33,3	24,0	17,2	11,1	3,6	
69 cm	430	90,4	81,9	74,1	67,1	60,8	49,8	37,0	22,5	13,6	7,5	4,0			
23.1 cm	1296	83,0	69,4	57,9	48,4	40,4	28,1	16,2	6,3						
12.5 cm	2400	76,2	58,9	45,5	35,1	26,9	15,7	6,5							
10 cm	3000	73,3	54,7	40,7	30,1	22,2	11,7	3,9							
7.5 cm	4000	68,4	48,0	33,4	23,0	15,6	6,4								
6 cm	5000	62,0	40,4	25,6	15,5	8,6									
5 cm	6000	55,3	32,7	17,9	8,2										
3.75 cm	8000	50,1	26,1	11,7	3,1										
3 cm	10.000	45,8	21,1	7,4											
2.5 cm	12.000	41,8	16,8	3,9											

EXTRAFLEX BURY 10 Power Handling/Temperature (in Continuous Carrier - 50% Duty Cycle)

		Temperature C° / F°										
Wave length	MHz	-10 / 14	-5 / 23	0 / 32	10 / 50	20 / 68	30 / 86	40 / 104	50 / 122	60 / 140	70 / 158	
166.66 m	1,8	8639	8349	8104	7590	6987	6273	5581	4761	3940	3125	
85.71 m	3,5	7094	6856	6655	6233	5738	5151	4583	3909	3236	2566	
42.85 m	7	5977	5776	5606	5251	4834	4340	3861	3293	2726	2162	
30 m	10	5336	5157	5005	4688	4316	3874	3447	2940	2434	1930	
21.42 m	14	4664	4507	4375	4098	3772	3387	3013	2570	2127	1687	
14.28 m	21	3913	3782	3671	3438	3165	2841	2528	2156	1785	1416	
10.71 m	28	3427	3312	3215	3011	2772	2489	2214	1889	1563	1240	
6 m	50	2563	2477	2405	2252	2073	1861	1656	1413	1169	927	
3 m	100	1783	1723	1673	1567	1442	1295	1152	983	813	645	
2.08 m	144	1480	1430	1388	1300	1197	1075	956	815	675	535	
1.5 m	200	1251	1209	1173	1099	1012	908	808	689	570	452	
75 cm	400	868	839	815	763	702	631	561	479	396	314	
69 cm	430	841	812	788	738	680	610	543	463	383	304	
37.5 cm	800	607	586	569	533	491	441	392	334	277	220	
30 cm	1000	539	521	505	473	436	391	348	297	246	195	
23.1 cm	1296	467	452	439	411	378	339	302	258	213	169	
12.5 cm	2400	333	322	312	292	269	242	215	183	152	120	
10 cm	3000	294	284	276	258	238	214	190	162	134	106	
7.5 cm	4000	249	241	234	219	202	181	161	137	114	90	
6 cm	5000	220	212	206	193	178	160	142	121	100	80	
5 cm	6000	197	190	184	173	159	143	127	108	90	71	
4.2 cm	7000	180	174	168	158	145	130	116	99	82	65	
3.75 cm	8000	164	159	154	144	133	119	106	90	75	59	
3 cm	10.000	140	136	132	123	113	102	91	77	64	50	

Do not use the cable as power supply for both direct current and 50-60 HZ mains

GENERIC COAXIAL CABLE APPLICATIONS*

- Aircraft communications
 - Amateur Radio
 - Antenna
 - Antenna Analyzer
 - Beacons Base Station
 - Broadcast Radios
 - CB Radio (Citizen Band)
 - CB Radio Scanner
 - Dummy Load
 - Land Mobile Communications
 - Maritime Mobile Communications
 - Military Communications
 - Microwave Relay System
 - Moon Bouncing Transmission EME
 - Mobile Transmission Applications (Car, Van, Caravans, Trucks, etc.)
 - Motorhome
 - Network Analyzer
 - Portable Handheld Radio (Walkie Talkie - PMR antenna extension)
 - Radar
 - Radio Astronomy and Telescope
 - Radio Receivers
 - Router connections
 - Satellite Radio
 - Scanner
 - Switch connections
 - SWR Meter connections
 - Transceiver
 - Tuner connections
 - Weather Radio Antenna Extension
- *See "Frequency Suggestions" for a correct correlation

PRE-ASSEMBLED COAX JUMPERS

YOU'VE NO TIME FOR ASSEMBLING THE CONNECTORS YOURSELF?
GRAB OUR FACTORY MADE COAX JUMPERS "LAB TESTED" ONE BY ONE!
LAB CERTIFICATE ENCLOSED IN EACH PACKAGING.



USEFUL ACCESSORIES



SPECIAL COAX SCISSORS



ADHESIVE REUSABLE
VELCRO



CABLE PULLING LUBRICANT



M&P T-SHIRT



UNWINDERS FOR COILS AND BOBBINS



CONNECTORS for 10,3mm (.400") Coaxial Cables

EVOlution



“UHF” (PL-259) Male Solder

Watch the Assembly

Video:

<https://youtu.be/35SWUllkVjw>

Code:

CO.UHF.10M-S EVO



“UHF” (PL-259) Female Solder

Watch the Assembly

Video:

https://youtu.be/vVuTp_wYSio

Code:

C.UHF.BROAD50F-S



“UHF” Male Solder - 90° Angle

Watch the Assembly

Video:

<https://youtu.be/qQoZT4TqF4w>

Code:

C.UHF.BROAD50-M90



“PL259” Male Solder (standard)

Watch the Assembly

Video:

https://youtu.be/DWIKgl62M_8

Code:

C.BROAD.PL259



“N” Male Solder

Watch the Assembly

Video:

<https://youtu.be/c6Z8jHE3gC4>

Code:

CO.N.10M-S



“N” Female Solder

Watch the Assembly

Video:

<https://youtu.be/P18ViE8Exhk>

Code:

C.N.BROAD50-FS



“N” Male Solderless

Watch the Assembly

Video:

<https://youtu.be/SexpyifQn6Y>

Code:

C.N.BROAD50-SL



“N” Female Solderless

Watch the Assembly

Video:

<https://youtu.be/RJdiLYtpBk>

Code:

C.N.BROAD50-FSL



“N” Male Solder - 90° Angle

Watch the Assembly

Video:

<https://youtu.be/8NYoa-v7h74>

Code:

C.N.BROAD50-M90

CONNECTORS for 10,3mm (.400") Coaxial Cables



"N" Male Crimp

Watch the Assembly

Video:

<https://youtu.be/sggjEZKue8k>

Code:

C.N.BROAD50-MCR



"N" Female Crimp

Watch the Assembly

Video:

<https://youtu.be/l9jgcDznJlo>

Code:

C.N.BROAD50-FCR



"BNC" Male Solder

Watch the Assembly

Video:

<https://youtu.be/tsaUjVnlPkl>

Code:

C.BNC.BROAD50-M



"BNC" Female Solder

Watch the Assembly

Video:

<https://youtu.be/46SLt5mODjg>

Code:

C.BNC.BROAD50-FS



"TNC" Male Solder

Watch the Assembly

Video:

<https://youtu.be/A-ayPwR-epY>

Code:

C.TNC.BROAD50-MS



"TNC" Male Crimp

Watch the Assembly

Video:

<https://youtu.be/X1QgKRtiesk>

Code:

C.TNC.BROAD50-CR



"SMA" Male Solder

Watch the Assembly

Video:

https://youtu.be/whXmqoRqj_o

Code:

C.SMA.UF10M-S



7/16

Watch the Assembly

Video:

<https://youtu.be/CK12Z7Agi4U>

Code:

C.7-16.10M-S

HEAT SUPPRESSOR

Pairing to our "N" or "UHF" connectors, the Heat Suppressor represents an extension of the operational life of your valuable cables and a greater homogeneity of their performance in hot environments.

The benefits will also be more evident for those who use high power linear amplifiers for prolonged periods during contests.

Cooling and stabilizing the cable, could be the ace in your sleeve!

For other connectors and adapters, visit www.messi.it or contact us at web@messi.it

